

Wave 1200 White 5530lm 4000K Ra>80 DALI-2

Article code: 111216
EAN: 7021981112165



Electrical

System wattage: 42W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36
Leakage current (mA): 0.29

Light technic

Type of light source: LED
Luminous flux: 5530lm
Efficacy: 132 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>100,000
Lifetime: L80/B10>70,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IK Class: IK06
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Steel, Aluminium
Colour: White (RAL 9003)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 1200
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1220
Width (mm) W: 151
Height (mm) H: 54
Weight (kg) gross/net: 3 / 2.5

Packaging

Packing dimensions (mm): 1245 x 160 x 60

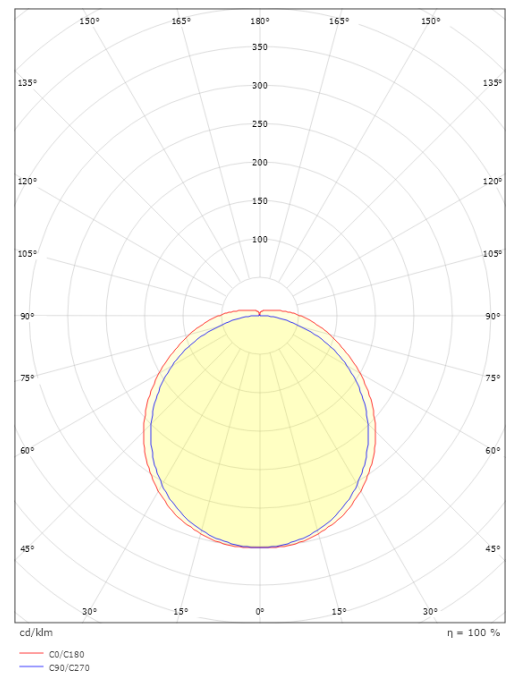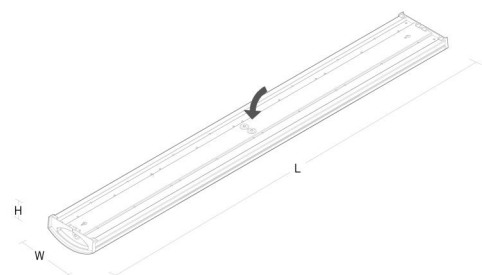

7 0 2 1 9 8 1 1 2 1 6 5