

Wave 600 White 2330lm 4000K Ra>80 Trailing edge

Article code: 111285
 EAN: 7021981112851

**Electrical**

System wattage: 18W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
 Luminous flux: 2330lm
 Efficacy: 129 lm/W
 Colour temperature: 4000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B50>50,000
 Light distribution: Direct
 Optic: Opal
 Beam angle: 110°
 UGR: UGR<25
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
 IK Class: IK06
 IP Class: IP44

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes
 Sunda Hus: C+

Materials and finish

Housing: Steel, Aluminium
 Colour: White (RAL 9003)
 Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Surface, Indoor
 Module: 600
 Connection: 4-pole screwless terminal block with 4x2,5mm² coupling from center to end

Dimensions

Length (mm) L: 620
 Width (mm) W: 151
 Height (mm) H: 54
 Weight (kg) gross/net: 2.244 / 1.77

Packaging

Packing dimensions (mm): 640 x 160 x 60

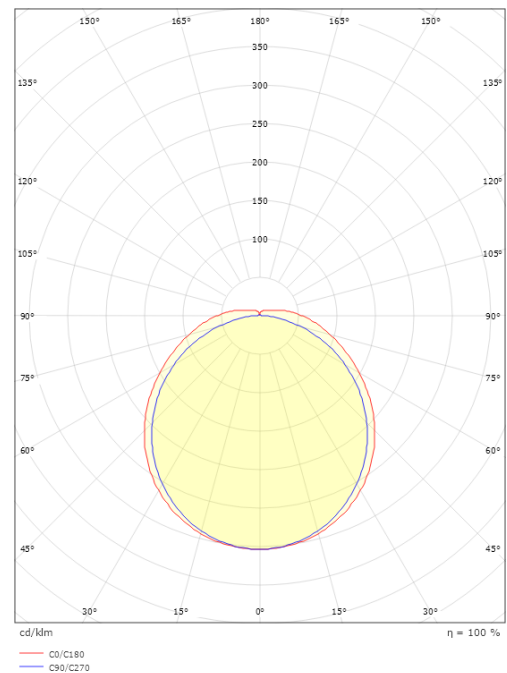

7 0 2 1 9 8 1 1 2 8 5 1