

Prelude



Prelude White w/ 2 x outlet 1020lm 2700K Ra>90 Trailing edge

Article code: 111343
EAN: 7021981113438



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 23, B16: 37, C10: 29, C16: 46

Light technic

Type of light source: LED
Luminous flux: 1020lm
Efficacy: 73 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L70/B10>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK05
IP Class: IP44 (mounted horizontally) / IP20 (mounted vertically)

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 630
Width (mm) W: 70
Height (mm) H: 81
Depth (D): 81
Weight (kg) gross/net: 1.2 / 0.81

Packaging

Packing dimensions (mm): 640 x 90 x 80

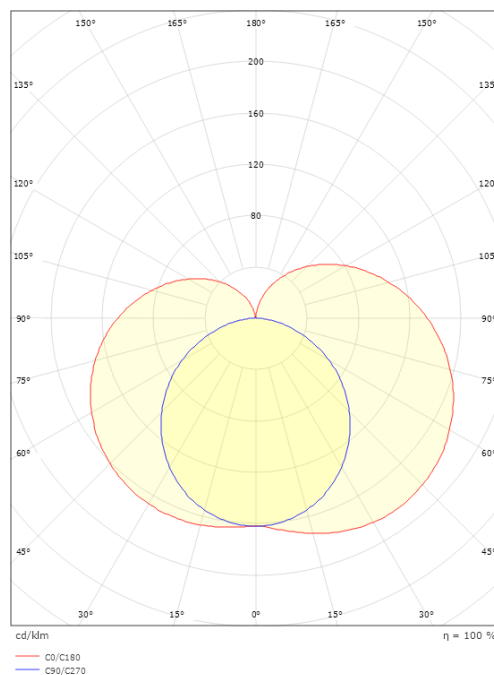

7 0 2 1 9 8 1 1 1 3 4 3 8