

Prelude Square



Prelude Square White 1530lm 2700K Ra>90 Trailing edge

Article code: 111370
EAN: 7021981113704



Electrical

System wattage: 13W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1530lm
Efficacy: 118 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Light distribution: Direct
Optic: Acrylic diffuser
Visible flicker (PstLM): 0.04
Stroboscopic flicker (SVM): 0.04

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK05
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C-

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 519
Height (mm) H: 59
Depth (D): 62
Weight (kg) gross/net: 0.898 / 0.799

Packaging

Packing dimensions (mm): 528 x 65 x 65

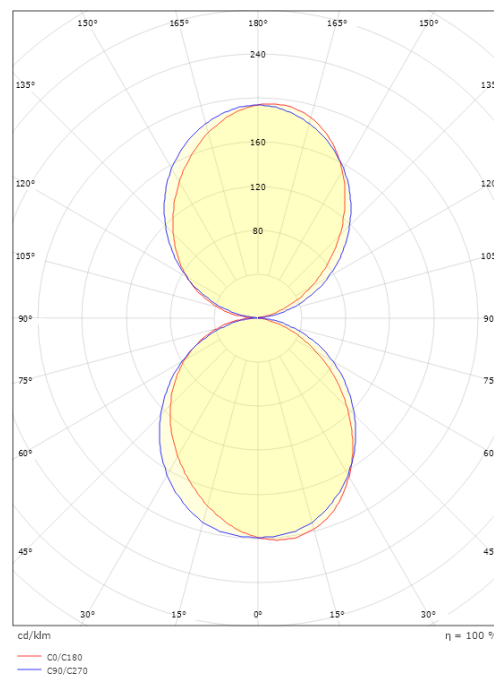

7 0 2 1 9 8 1 1 1 3 7 0 4