

Prelude Square



Prelude Square White w/ outlet 1620lm 3000K Ra>90 Trailing edge

Article code: 111373
EAN: 7021981113735



Electrical

System wattage: 13W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1620lm
Efficacy: 125 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Light distribution: Direct
Optic: Acrylic diffuser

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK05
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)
Surge protection: Integrated (min. 4 kV)

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 590
Height (mm) H: 59
Depth (D): 62
Weight (kg) gross/net: 1.085 / 0.969

Packaging

Packing dimensions (mm): 596 x 65 x 65

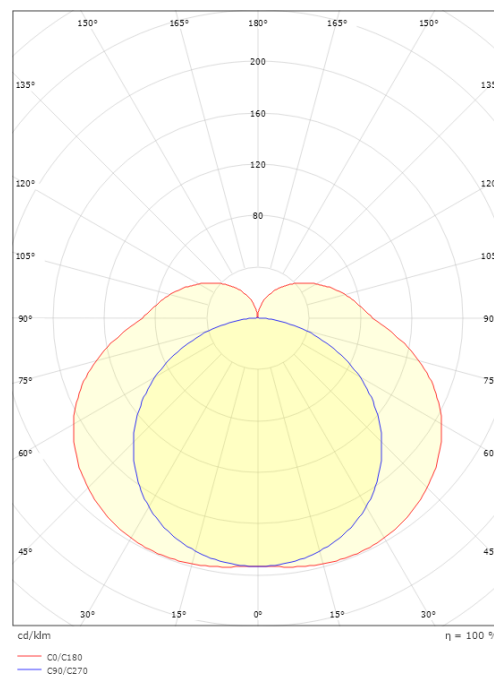

7 0 2 1 9 8 1 1 1 3 7 3 5