

Prelude Square



Prelude Square White 1700lm 4000K Ra>90 Trailing edge

Article code: 111380
EAN: 7021981113803



Electrical

System wattage: 13W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

Light technic

Type of light source: LED
Luminous flux: 1700lm
Efficacy: 131 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B10>100,000
Lifetime: L80/B10>60,000
Light distribution: Direct
Optic: Acrylic diffuser

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK05
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C-

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 519
Height (mm) H: 59
Depth (D): 62
Weight (kg) gross/net: 0.898 / 0.799

Packaging

Packing dimensions (mm): 528 x 65 x 65

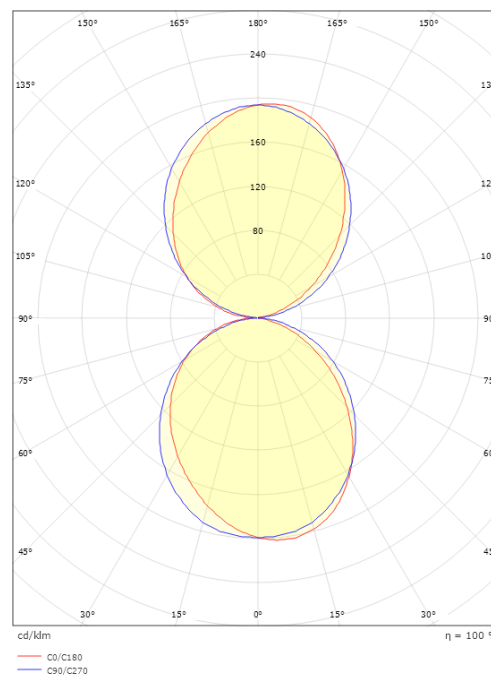

7 0 2 1 9 8 1 1 1 3 8 0 3