

# Prelude Square



## Prelude Square White 1540lm 4000K Ra>90 DALI-2

Article code: 111383  
EAN: 7021981113834



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 16W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

### Light technic

Type of light source: LED  
Luminous flux: 1540lm  
Efficacy: 96 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>90  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>50,000  
Lifetime: L80/B10>60,000  
Light distribution: Direct  
Optic: Acrylic diffuser

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
IK Class: IK05  
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White (RAL 9003)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: Screwless terminal block

### Dimensions

Width (mm) W: 519  
Height (mm) H: 59  
Depth (D): 62  
Weight (kg) gross/net: 0.898 / 0.799

### Packaging

Packing dimensions (mm): 528 x 65 x 65

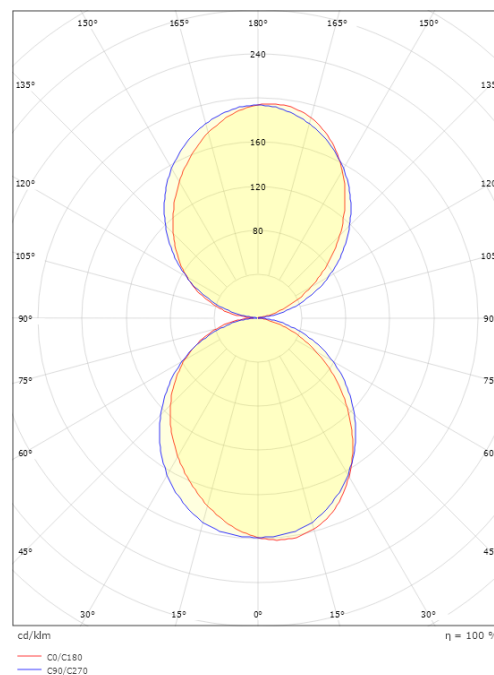

7 0 2 1 9 8 1 1 1 3 8 3 4