

# Prelude Square



## Prelude Square 1200 White 2860lm 3000K Ra>90 Trailing edge

Article code: 111411  
EAN: 7021981114114



### Electrical

System wattage: 22W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Luminous flux: 2860lm  
Efficacy: 130 lm/W  
Colour temperature: 3000K  
Colour rendering (Ra): Ra>90  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>  
Lifetime: L80/B10>100,000  
Light distribution: Direct  
Optic: Acrylic diffuser  
UGR: UGR<28

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
IK Class: IK05  
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White (RAL 9003)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Indoor  
Module: 1200  
Connection: Screwless terminal block

### Dimensions

Width (mm) W: 1196  
Height (mm) H: 60  
Depth (D): 52  
Weight (kg) gross/net: 1.99 / 1.745

### Packaging

Packing dimensions (mm): 1205 x 65 x 65

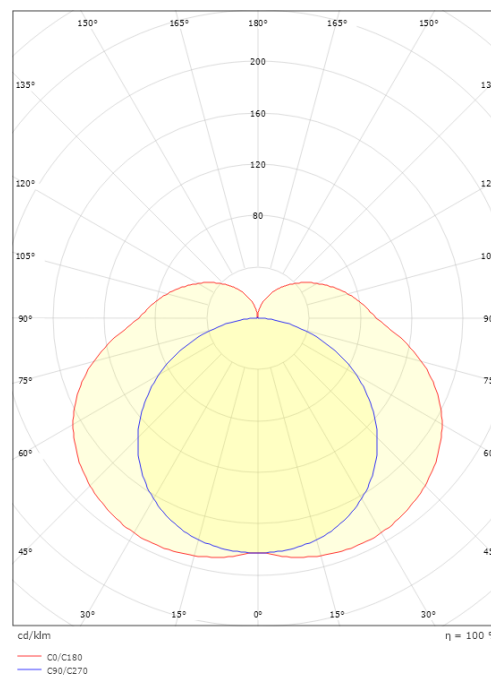

7 0 2 1 9 8 1 1 4 1 1 4