

Namsen 600 White w/ 2 x outlet 920lm 3000K Ra>80 Trailing edge

Article code: 112023
EAN: 7021981120238



Electrical

System wattage: 12W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 920lm
Efficacy: 77 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B50>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<28
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Steel
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 600
Connection: Screwless terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 69
Height (mm) H: 46
Weight (kg) gross/net: 1.32 / 1.213

Packaging

Packing dimensions (mm): 600 x 75 x 55

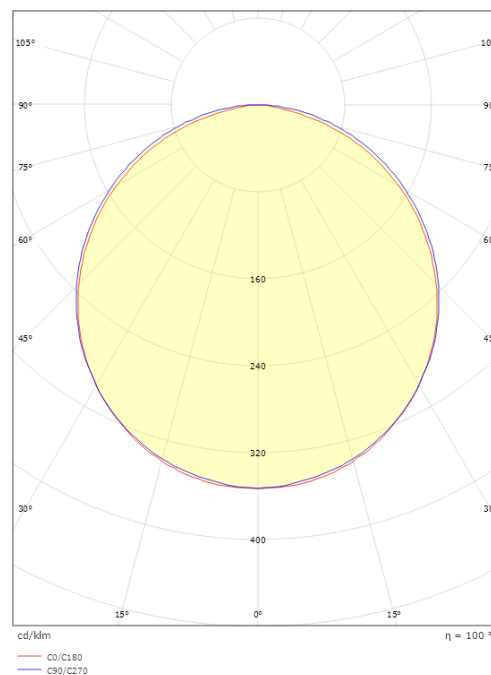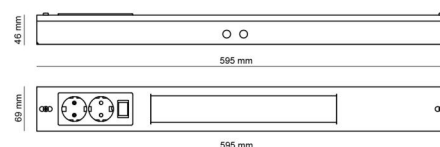

7 0 2 1 9 8 1 1 2 0 2 3 8