

Hurdal 1200 White 3660lm 4000K Ra>80 On/Off

Article code: 113104
EAN: 7021981131043



Electrical

System wattage: 24W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 14, B16: 23, C10: 22, C16: 36
Leakage current (mA): 0.25

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 3660lm
Efficacy: 153 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<25
Visible flicker (PstLM): 0.09
Stroboscopic flicker (SVM): 0.03
Photobiological safety: RG 0

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK07
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 1200
Connection: 3-pole screwless terminal block with 3x2,5mm² through wiring

Dimensions

Length (mm) L: 1200
Width (mm) W: 72
Height (mm) H: 76
Weight (kg) gross/net: 1.9 / 1.65

Packaging

Packing dimensions (mm): 1223 x 76 x 88

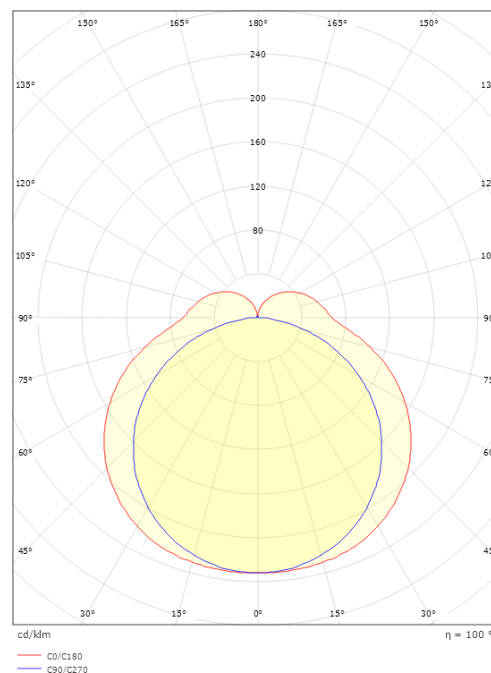

7 0 2 1 9 8 1 1 3 1 0 4 3