

Hurdal 600 White 1710lm 4000K Ra>80 Sensor Dim

Article code: 113109
EAN: 7021981131098



Electrical

System wattage: 12W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51
Leakage current (mA): 0,34

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 1710lm
Efficacy: 143 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<25
Visible flicker (PstLM): <1
Stroboscopic flicker (SVM): <0,4
Photobiological safety: RG 0

Control/Dimming

Type: Sensor Dim

Protection

Luminaire class: Class I
IK Class: IK07
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 600
Connection: 6-pole screwless terminal block with 4x2,5mm² through wiring+2x1,5mm² control

Dimensions

Length (mm) L: 600
Width (mm) W: 72
Height (mm) H: 76
Weight (kg) gross/net: 1.15 / 0.95

Packaging

Packing dimensions (mm): 623 x 76 x 88

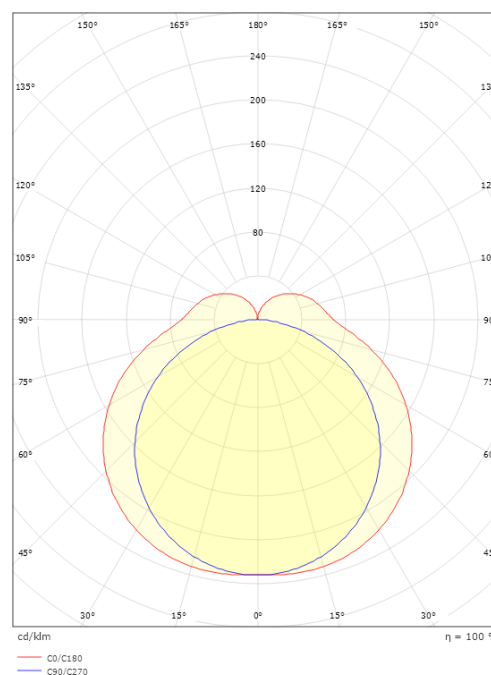

7 0 2 1 9 8 1 1 3 1 0 9 8