

Hurdal Connect



Hurdal Connect 600 White 1590lm 3000K Ra>80 Connect

Article code: 113126
EAN: 7021981131265



Electrical

System wattage: 12W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 25, B16: 40, C10: 41, C16: 68
Leakage current (mA): 0,7

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 1590lm
Efficacy: 133 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<25
Visible flicker (PstLM): <1
Stroboscopic flicker (SVM): <0,4
Photobiological safety: RG 0

Control/Dimming

Type: Connect

Protection

Luminaire class: Class I
IK Class: IK07
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 600
Connection: 3-pole screwless terminal block with 3x2,5mm2 through wiring

Dimensions


Length (mm) L: 600
Width (mm) W: 72
Height (mm) H: 76
Weight (kg) gross/net: 1.15 / 0.95

Packaging

Packing dimensions (mm): 623 x 76 x 88

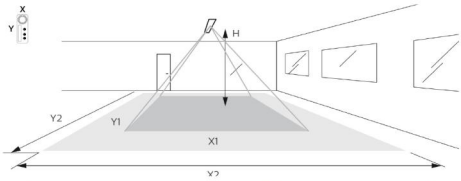

H (m)	Minor movements		Major movements	
	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2.4	1.9	2.9	2.9	4.3
3	2.4	3.6	3.6	5.4

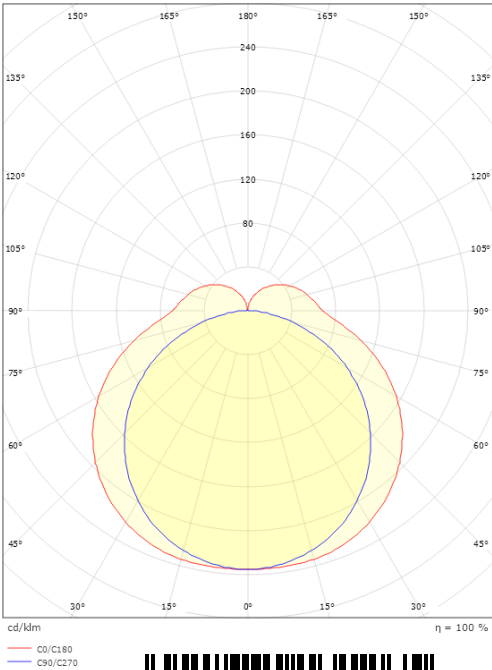

7 0 2 1 9 8 1 1 3 1 2 6 5