

# Area 66



## Area 66 Grey 4500lm 4000K Ra>80 DALI-2

Article code: 120003  
EAN: 7021981200039



### Electrical

System wattage: 36W  
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 24, C16: 38  
Leakage current (mA): 0.30

### Light technic

Type of light source: LED  
Luminous flux: 4500lm  
Efficacy: 125 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B10>100,000  
Lifetime: L90/B50>50,000  
Minimum ambient temperature: -25°C  
Light distribution: Direct  
Optic: Opal  
Beam angle: 100°  
UGR: UGR<28

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
IK Class: IK10  
IP Class: IP66

### Energy and approvals

Contains light source of energy class: D  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes

### Materials and finish

Housing: UV-stabilized polycarbonate  
Colour: Grey  
Optics: UV-stabilized polycarbonate

### Mounting/Connection


Mounting: Surface, Indoor  
Connection: 7-pole screwless terminal block with 5x2,5mm2  
(+DALI) through wiring

### Dimensions

Length (mm) L: 1174  
Width (mm) W: 92  
Height (mm) H: 70  
Weight (kg) gross/net: 2.832 / 2.36

### Packaging

Packing dimensions (mm): 1230 x 110 x 80

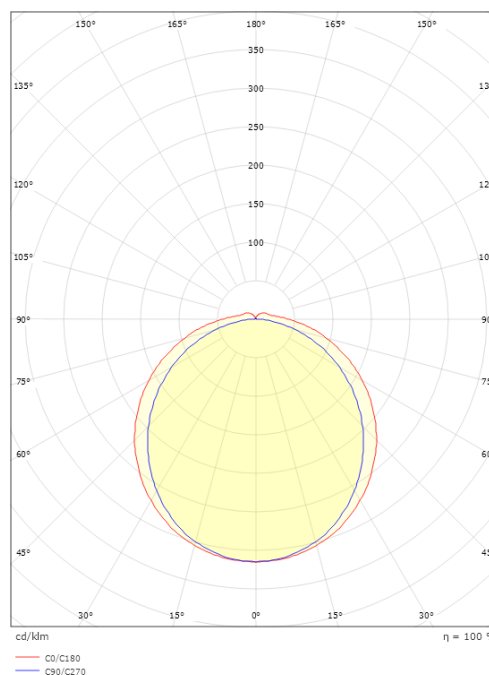

7 0 2 1 9 8 1 2 0 0 0 3 9