

Farm 66



Farm 66 1500 Grey 5860lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 120012
EAN: 7021981200121



Electrical

System wattage: 43W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 40
Leakage current (mA): 0.32

Light technic

Type of light source: LED
Luminous flux: 5860lm
Efficacy: 136 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B50>50,000
Minimum ambient temperature: -25°C
Light distribution: Direct
Optic: Opal
UGR: UGR<28

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
Food Safety approved (IFS and HACCP): Yes

Materials and finish

Housing: PC with ammonia-protection coating, end caps in ASA
Colour: Grey
Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Surface, Indoor
Module: 1500
Connection: 7-pole screwless terminal block with 5x2,5mm2 (+DALI) through wiring

Dimensions

Length (mm) L: 1460
Width (mm) W: 112
Height (mm) H: 67
Weight (kg) gross/net: 2.236 / 1.885

Packaging

Packing dimensions (mm): 1466 x 114 x 71

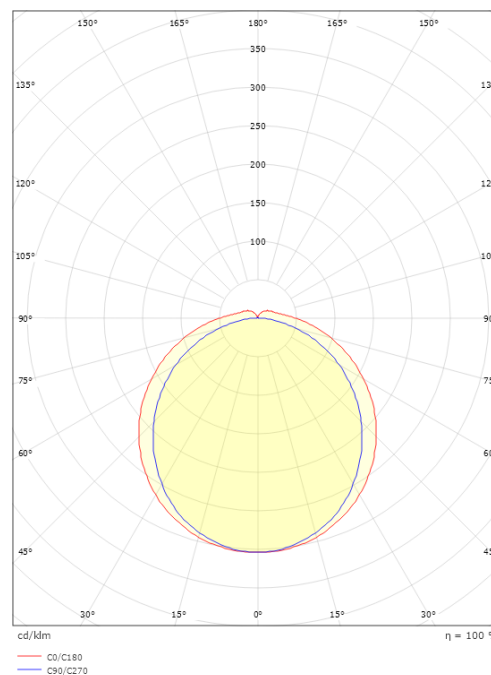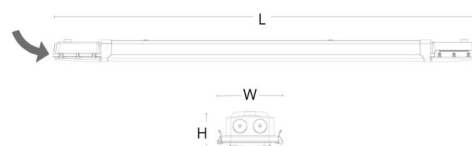

7 0 2 1 9 8 1 2 0 0 1 2 1