

# Tysnes 66



## Tysnes 66 650 Grey 2060lm 4000K Ra>80 On/Off

Article code: 120030  
EAN: 7021981200305



### Electrical

System wattage: 14W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 40, B16: 60, C10: 40, C16: 60  
Leakage current (mA): 0.21

### Light technic

Type of light source: LED  
Luminous flux: 2060lm  
Efficacy: 147 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Lifetime: L90>50,000  
Minimum ambient temperature: -25°C  
Light distribution: Direct  
Optic: Opal  
Beam angle: 121°  
UGR: UGR<25  
Visible flicker (PstLM): 0.19  
Stroboscopic flicker (SVM): 0.02  
Photobiological safety: RG 0

### Control/Dimming

Type: On/Off

### Protection

Luminaire class: Class I  
IK Class: IK10  
IP Class: IP66  
Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting  
Food Safety approved (IFS and HACCP): Yes

### Materials and finish

Housing: UV-stabilized polycarbonate  
Colour: Grey  
Optics: UV-stabilized polycarbonate

### Mounting/Connection



Mounting: Surface, Indoor  
Module: 650  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 650  
Width (mm) W: 85  
Height (mm) H: 80  
Weight (kg) gross/net: 0.9 / 0.8

### Packaging

Packing dimensions (mm): 680 x 85 x 90

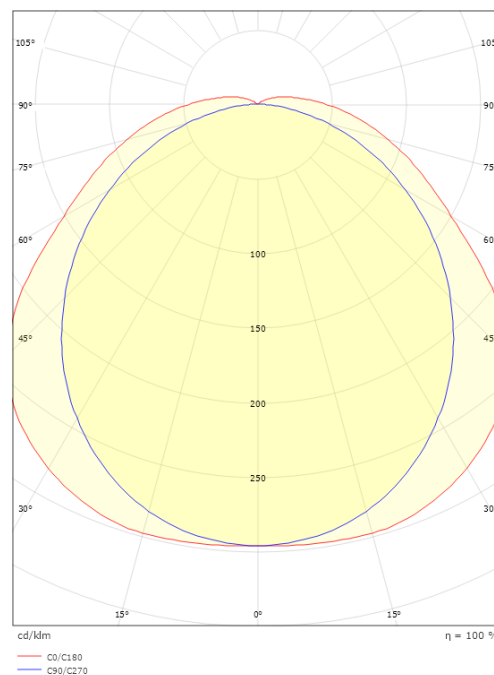

7 0 2 1 9 8 1 2 0 0 3 0 5