

# Tysnes 66



## Tysnes 66 1500 Grey 6400lm 4000K Ra>80 DALI-2

Article code: 120037  
EAN: 7021981200374



### Electrical

System wattage: 40W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 12, B16: 20, C10: 21, C16: 34  
Leakage current (mA): 0.29

### Light technic

Type of light source: LED  
Light source included: Yes  
Luminous flux: 6400lm  
Efficacy: 160 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Lifetime: L90>50,000  
Light distribution: Direct  
Optic: Opal  
Beam angle: 117°

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class I  
IK Class: IK10  
IP Class: IP66  
Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting  
Food Safety approved (IFS and HACCP): Yes

### Materials and finish

Housing: UV-stabilized polycarbonate  
Colour: Grey  
Optics: UV-stabilized polycarbonate

### Mounting/Connection



Mounting: Surface, Indoor  
Module: 1500  
Connection: 5-pole screwless terminal block with 5x2,5mm<sup>2</sup> through wiring

### Dimensions

Length (mm) L: 1500  
Width (mm) W: 85  
Height (mm) H: 80  
Weight (kg) gross/net: 1.98 / 1.78

### Packaging

Packing dimensions (mm): 1525 x 85 x 90

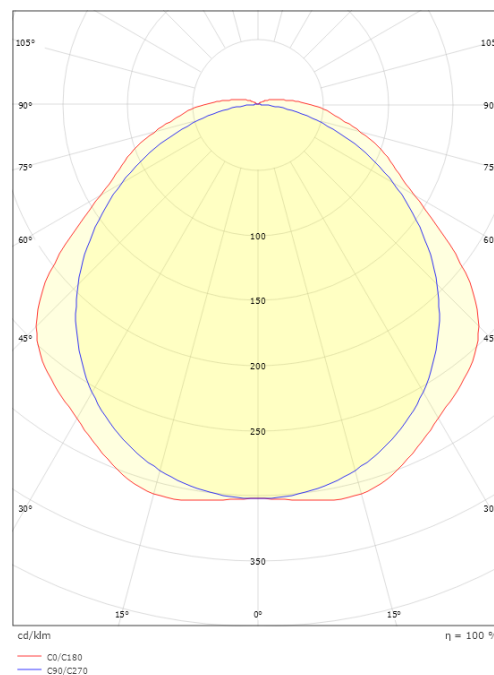

7 0 2 1 9 8 1 2 0 0 3 7 4