

Tysnes 66 Pro



Tysnes 66 Pro 1500 Grey 9430lm 4000K Ra>80 On/Off

Article code: 120051
EAN: 7021981200510
Replaces: 120007



Electrical

System wattage: 55W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 20, B16: 32, C10: 33, C16: 54
Leakage current (mA): 0.25

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 9430lm
Efficacy: 171 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Lifetime: L90>50,000
Minimum ambient temperature: -40°C
Light distribution: Direct
Optic: Opal
Beam angle: 119°

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Breeam: Fulfils Hea 01 for flicker free lighting
Food Safety approved (IFS and HACCP): Yes

Materials and finish

Housing: UV-stabilized polycarbonate
Colour: Grey
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 1500
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1500
Width (mm) W: 85
Height (mm) H: 80
Weight (kg) gross/net: 1.976 / 1.776

Packaging

Packing dimensions (mm): 1525 x 90 x 85

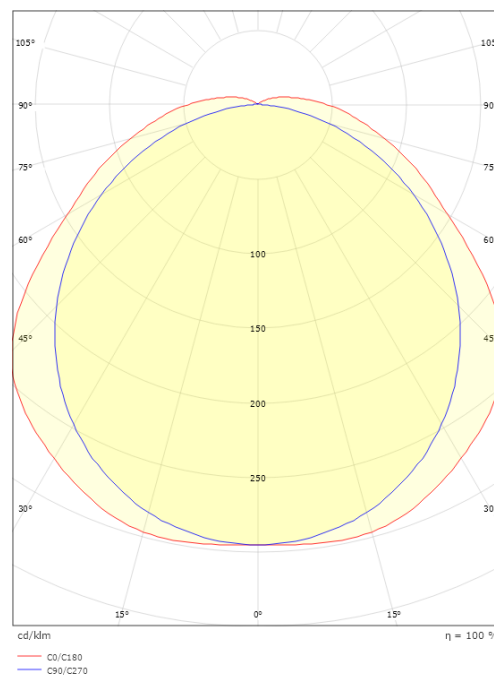

7 0 2 1 9 8 1 2 0 0 5 1 0