

Tysnes 66 Pro



Tysnes 66 Pro 1500 Grey 9430lm 4000K Ra>80 DALI-2

Article code: 120053
EAN: 7021981200534
Replaces: 120008



Electrical

System wattage: 55W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 23, B16: 36, C10: 37, C16: 61
Leakage current (mA): 0.32

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 9430lm
Efficacy: 171 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Lifetime: L90>50,000
Minimum ambient temperature: -40°C
Light distribution: Direct
Optic: Opal
Beam angle: 119°

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Food Safety approved (IFS and HACCP): Yes

Materials and finish

Housing: UV-stabilized polycarbonate
Colour: Grey
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 1500
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1500
Width (mm) W: 85
Height (mm) H: 80
Weight (kg) gross/net: 1.976 / 1.776

Packaging

Packing dimensions (mm): 1525 x 90 x 85

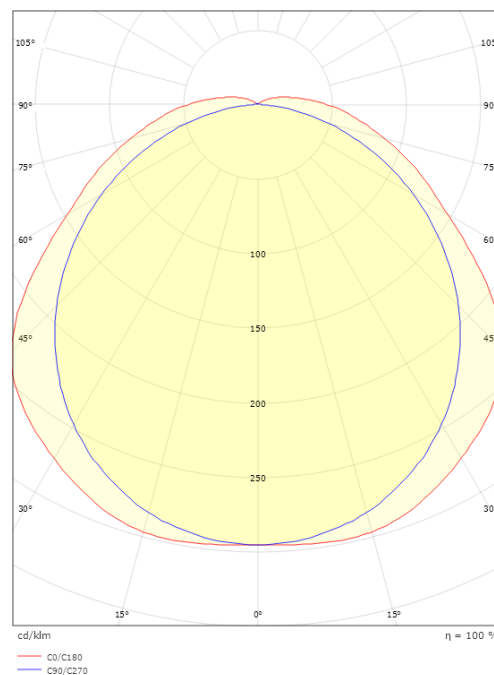

7 0 2 1 9 8 1 2 0 0 5 3 4