

Tysnes 66 Connect Wireless



Tysnes 66 Connect 1500 Grey 5560lm 4000K Ra>80 Connect Wireless

Article code: 120056
EAN: 7021981200565



Electrical

System wattage: 32W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 22, B16: 35, C10: 36, C16: 60

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 5560lm
Efficacy: 174 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
Beam angle: 121°

Control/Dimming

Type: Connect Wireless

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
Food Safety approved (IFS and HACCP): Yes

Materials and finish

Housing: UV-stabilized polycarbonate
Colour: Grey
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Module: 1500
Connection: 3-pole screwless terminal block with 3x2,5mm² through wiring

Dimensions

Length (mm) L: 1500
Width (mm) W: 85
Height (mm) H: 80
Weight (kg) gross/net: 1.98 / 1.78

Packaging

Packing dimensions (mm): 1525 x 85 x 90

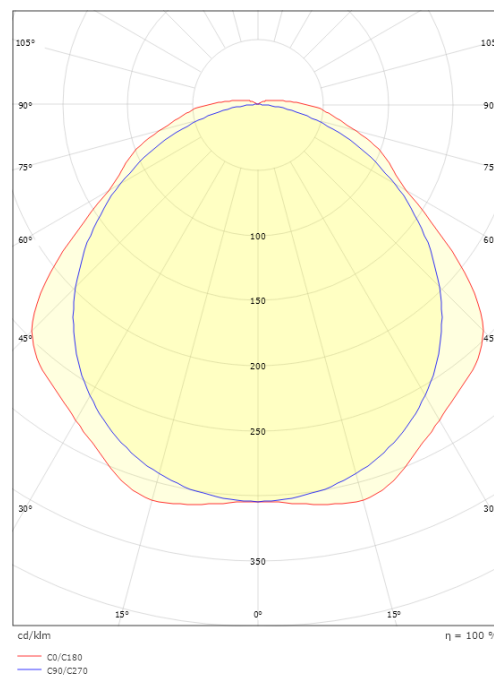

7 0 2 1 9 8 1 2 0 0 5 6 5