

Econ Midi 2000



Econ Midi 2000 White 2030lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 143080
EAN: 7021981430801



Electrical

System wattage: 18W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 2030lm
Efficacy: 113 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>100,000
Lifetime: L80/B10>60,000
Light distribution: Direct
Optic: Opal
Beam angle: 120°

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C-

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 98
Diameter (mm) D: 350
Weight (kg) gross/net: 2.072 / 1.872

Packaging

Packing dimensions (mm): 360 x 360 x 100

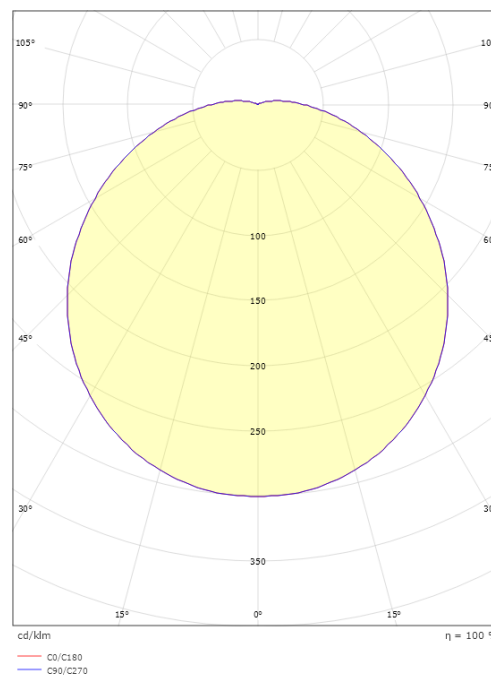

7 0 2 1 9 8 1 4 3 0 8 0 1