

Calando LED



Calando White 650lm 3000K Ra>80 Trailing edge

Article code: 211514
EAN: 7021982115141
Replaces: 211512



Electrical

System wattage: 10W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
Luminous flux: 650lm
Efficacy: 65 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B50>50,000
Light distribution: Direct
Optic: Glass Opal
Beam angle: 120°
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP44

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Length (mm) L: 280
Width (mm) W: 280
Height (mm) H: 100
Weight (kg) gross/net: 2.652 / 2.21

Packaging

Packing dimensions (mm): 300 x 300 x 160

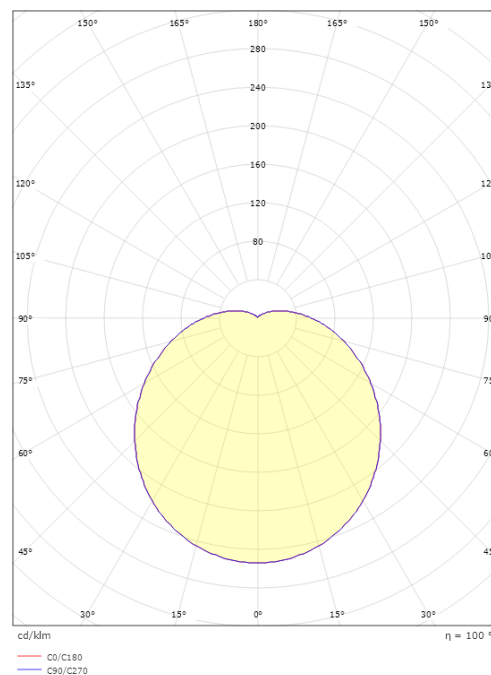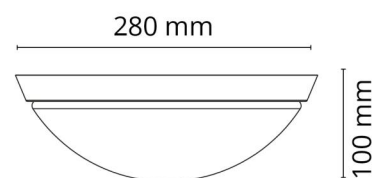

7 0 2 1 9 8 2 1 1 5 1 4 1