

Circulus White 1530lm 3000K Ra>80 Trailing edge

Article code: 212001
EAN: 7021982120015



Electrical

System wattage: 15W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1530lm
Efficacy: 102 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Lifetime: L70/B50>100,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IK Class: IK05
IP Class: IP21

Energy and approvals

Contains light source of energy class: B
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: Matte white (RAL 9003)
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions


Height (mm) H: 45
Diameter (mm) D: 360
Weight (kg) gross/net: 2.52 / 2.1

Packaging

Packing dimensions (mm): 370 x 370 x 55



Ø360 mm
45 mm

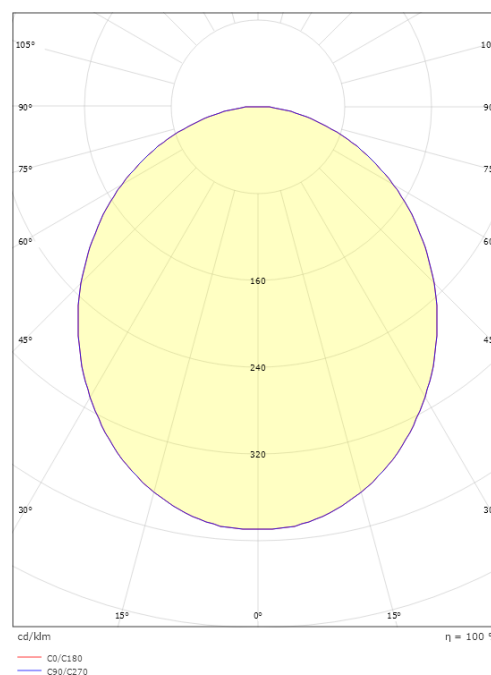

7 0 2 1 9 8 2 1 2 0 0 1 5