

Inspire Black 4140lm 3000K Ra>80 DALI-2 / Push Dim

Article code: 212087
EAN: 7021982120879



Electrical

System wattage: 34W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 8, B16: 13, C10: 12, C16: 20
Leakage current (mA): 0.29

Light technic

Type of light source: LED
Luminous flux: 4140lm
Efficacy: 122 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct/Indirect 50/50%
Optic: Cubic Optic Black
UGR: UGR<10
Photobiological safety: RG 1

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Polycarbonat (PC)

Mounting/Connection




Mounting: Suspended, Indoor
Wire set: 2x2m wire kit
Cable: Cable 5x0,75mm² 2,5m

Dimensions

Length (mm) L: 1241
Width (mm) W: 38
Height (mm) H: 67
Weight (kg) gross/net: 3.1 / 2.5

Packaging

Packing dimensions (mm): 1365 x 90 x 61

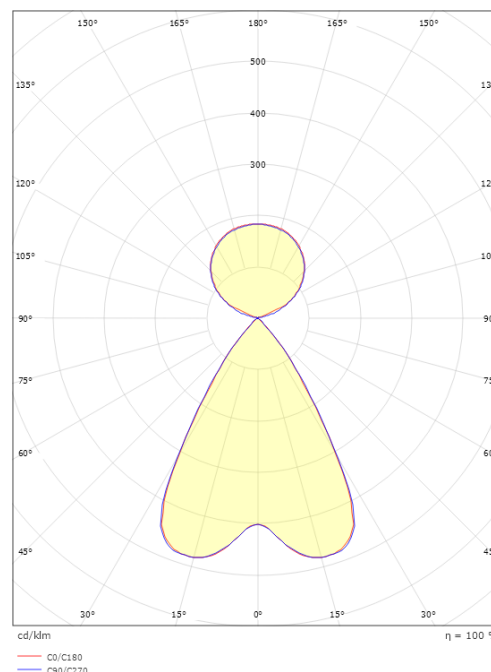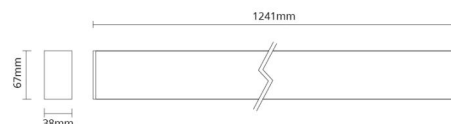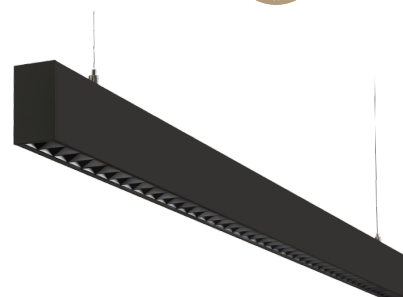

7 0 2 1 9 8 2 1 2 0 8 7 9