

Sense Basic



Sense Basic 600x600 White Incl driver 3760lm 3000K Ra>80 DALI-2 / Push

Dim

Article code: 212186
EAN: 7021982121869
Replaces: 212214



Electrical

System wattage: 31W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 3760lm
Efficacy: 121 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<19
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II SELV
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breem: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 600x600
Connection: 5 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 595
Height (mm) H: 36
Weight (kg) gross/net: 2.925 / 2.4

Packaging

Packing dimensions (mm): 700 x 685 x 57.5
Number per pack: 4

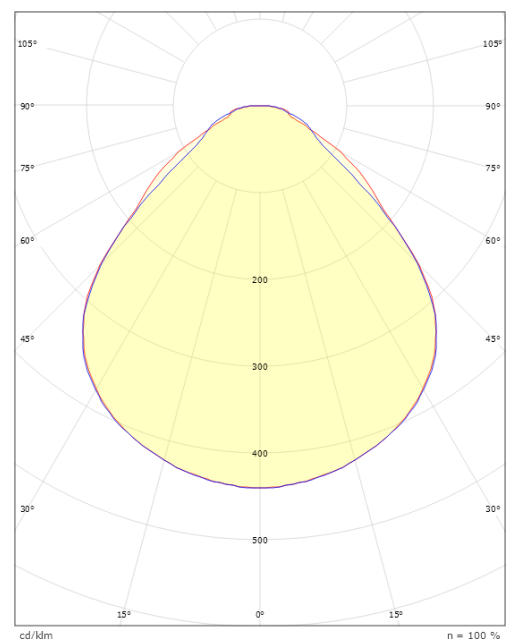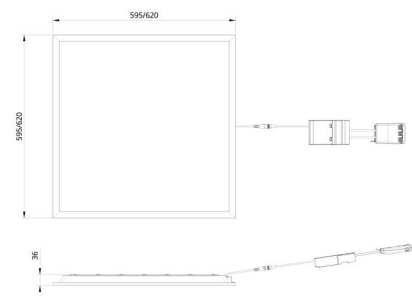

cd/klm
— C0/C180
— C90/C270

$\eta = 100\%$



7 0 2 1 9 8 2 1 2 1 8 6 9