

Sense Basic 2



Sense Basic 600x600 White Incl driver 4390lm 4000K Ra>80 DALI-2 LINECT

Article code: 212216
 EAN: 7021982122163
 Replaces: 212188



Electrical

System wattage: 33W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
 Luminous flux: 4390lm
 Efficacy: 133 lm/W
 Colour temperature: 4000K
 Colour rendering (Ra): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>100,000
 Light distribution: Direct
 Optic: Opalprism
 UGR: UGR<19
 Visible flicker (PstLM): 0.03
 Stroboscopic flicker (SVM): 0.01
 Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 LINECT

Protection

Luminaire class: Class II SELV
 IK Class: IK06
 IP Class: IP20

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
 Colour: White smooth (Ral 9016 gloss 30)
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
 Module: 600x600
 Connection: 5 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 595
 Width (mm) W: 595
 Height (mm) H: 36
 Depth (D): 26
 Weight (kg) gross/net: 2.75 / 2.16

Packaging

Packing dimensions (mm): 710 x 635 x 42

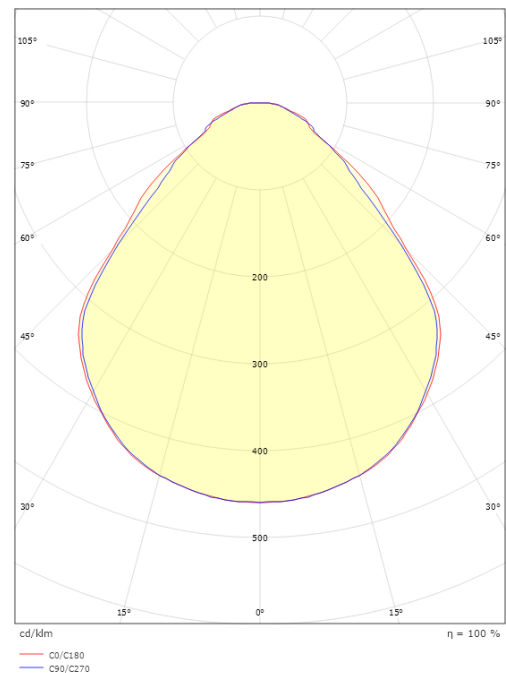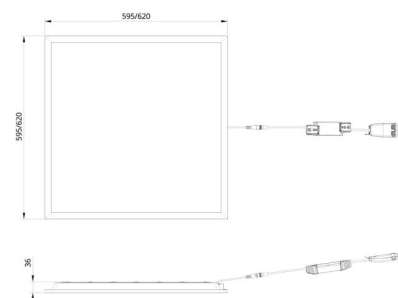

7 0 2 1 9 8 2 1 2 2 1 6 3