

Sense Eco Opalprism 300x1200



Sense ECO 300x1200 White Opalprism 2920lm 3000K Ra>80 Trailing edge

Article code: 212224+820490
EAN: 7021982122248+7021988204900



Electrical

System wattage: 27W
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 2920lm
Efficacy: 108 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°
UGR: UGR<18

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class III
IP Class: IP40/IP20

Energy and approvals

Breem: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 300x1200 Exposed T-carrier 15/24mm
Connection: Quick connector

Dimensions

Length (mm) L: 1197
Width (mm) W: 297
Height (mm) H: 10
Weight (kg) gross/net: 4.5 / 3

Packaging

Packing dimensions (mm): 1225 x 325 x 95

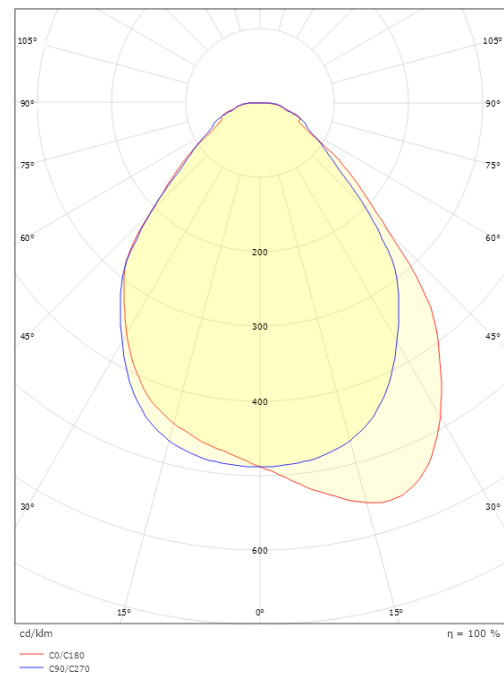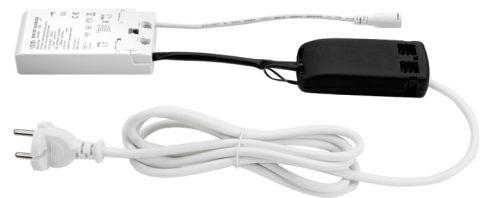

7021982122248+7021988204900