

Sense Round



Sense White 255 IsoSafe 1420lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 212272
EAN: 7021982122729



Electrical

System wattage: 12W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 35, B16: 55, C10: 57, C16: 92

Light technic

Type of light source: LED
Luminous flux: 1420lm
Efficacy: 118 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Connection: 5 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 25
Diameter (mm) D: 255
Cut-out (mm): 230
Ceiling void depth (mm): 25
Weight (kg) gross/net: 1.044 / 0.839

Packaging

Packing dimensions (mm): 260 x 260 x 65

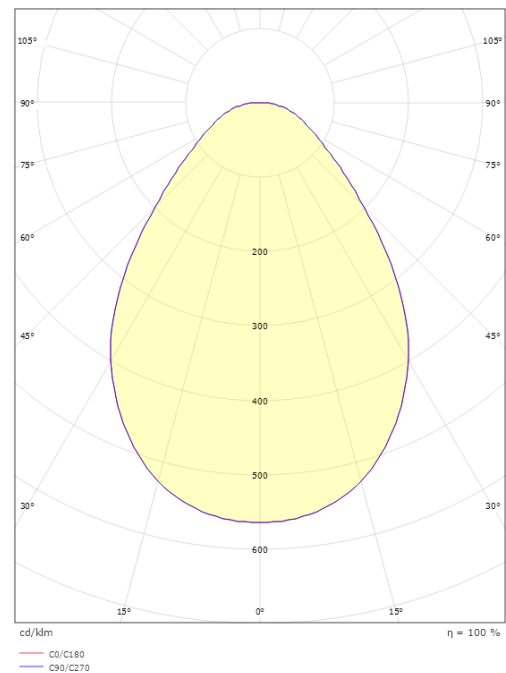

7 0 2 1 9 8 2 1 2 2 7 2 9