

Sense Round



Sense White 495 3660lm 3000K Ra>80 Trailing edge

Article code: 212291
EAN: 7021982122910



Electrical

System wattage: 31W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 3660lm
Efficacy: 118 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfil Hea 01 for flicker free lighting
BVB: Yes
Sunda Hus: C+

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 29
Diameter (mm) D: 495
Cut-out (mm): 475
Ceiling void depth (mm): 29
Weight (kg) gross/net: 3.1 / 2.6

Packaging

Packing dimensions (mm): 505 x 505 x 65

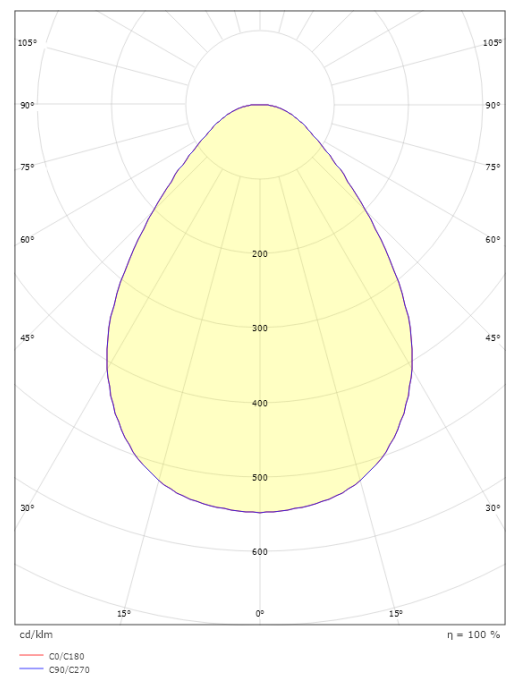

7 0 2 1 9 8 2 1 2 2 9 1 0