

Sense Round TW



Sense TW White 255 IsoSafe 1270lm 2700-6500K Ra>80 TW LEDDim

Article code: 212301
EAN: 7021982123016



Electrical

System wattage: 15W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 44, B16: 71, C10: 44, C16: 71

Light technic

Type of light source: LED
Luminous flux: 1270lm
Efficacy: 85 lm/W
Colour temperature: 2700-6500K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100.000 (50.000 as IsoSafe)
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
Photobiological safety: RG 0

Control/Dimming

Type: TW LEDDim

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection




Mounting: Recessed, Indoor

Dimensions

Diameter (mm) D: 255
Cut-out (mm): 230
Ceiling void depth (mm): 25
Weight (kg) gross/net: 1.044 / 0.839

Packaging

Packing dimensions (mm): 260 x 260 x 65

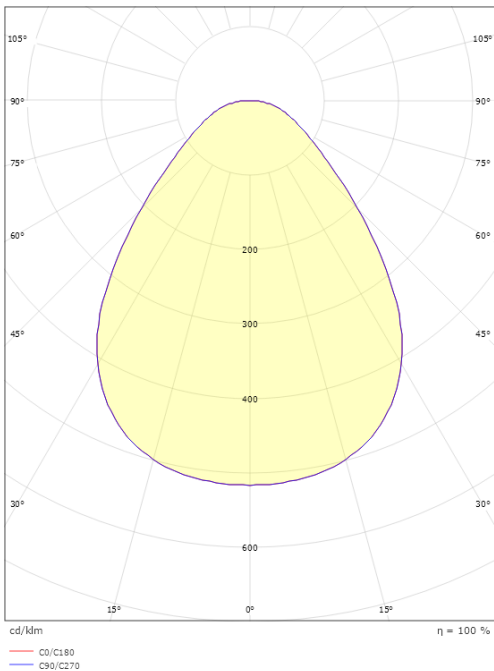

7 0 2 1 9 8 2 1 2 3 0 1 6