

# Sense Opalprism TW 300x1200



## Sense TW 300x1200 White Opalprism 4000lm 2700-6500K Ra>80

Article code: 212316  
EAN: 7021982123160  
Replaces: 212300



### Light technic

Type of light source: LED  
Luminous flux: 4000lm  
Colour temperature: 2700-6500K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>50,000  
Light distribution: Direct  
Optic: Opalprism  
Beam angle: 110°  
Photobiological safety: RG 0

### Protection

Luminaire class: Class III  
IK Class: IK10  
IP Class: IP40

### Energy and approvals

Contains light source of energy class: E

### Materials and finish

Housing: Aluminium  
Colour: White smooth (Ral 9016 gloss 30)  
Optics: Acrylic (PMMA)

### Mounting/Connection


Mounting: Recessed, Indoor  
Module: 300x1200 Exposed T-carrier 15/24mm  
Connection: Quick connector

### Dimensions

Length (mm) L: 1197  
Width (mm) W: 297  
Height (mm) H: 44  
Weight (kg) gross/net: 4.15 / 3.05

### Packaging

Packing dimensions (mm): 1235 x 335 x 65

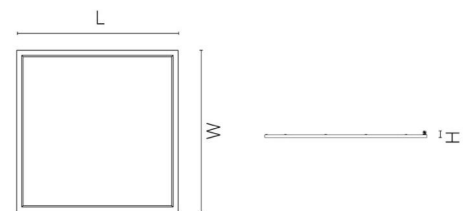


### DRIVER OPTIONS

#### Tunable White 1000mA / 1050mA • 42W / 40W • 4000lm

TW LEDDim Driver • 3-pol Lineact  
1000mA • 4000lm • 42W • Class II  
Prod.nr. 820093  
NO-E nr. 66 008 53  
SE-E nr. 79 818 49  
P-E nr. 40 033 32  
EAN 702198200933



TW DALI TB • 5-pol Lineact  
1050mA • 4000lm • 40W • Class II  
Prod.nr. 820239  
NO-E nr. 66 011 71  
SE-E nr. 79 821 68  
P-E nr. 40 033 60  
EAN 702198202395

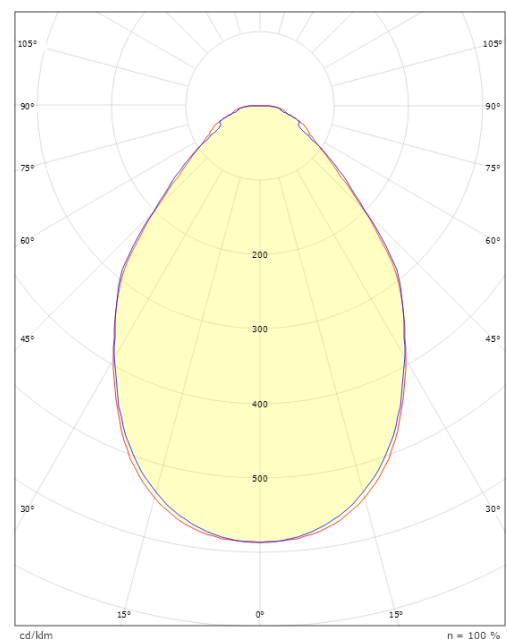

cd/kdm  
— C0/C180  
— C90/C270

$\eta = 100\%$



7 0 2 1 9 8 2 1 2 3 1 6 0