


Sense Surface



Sense Surface 600x600 White 3870lm 4000K Ra>80 Trailing edge

Article code: 212337
EAN: 7021982123375



Electrical

System wattage: 28W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 3870lm
Efficacy: 138 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<19
Visible flicker (PstLM): 0.07
Stroboscopic flicker (SVM): 0.07
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge
Driver: 800mA (500-800mA)

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 600x600
Connection: Screwless terminal block

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 45
Weight (kg) gross/net: 6.8 / 6.265

Packaging

Packing dimensions (mm): 625 x 625 x 65

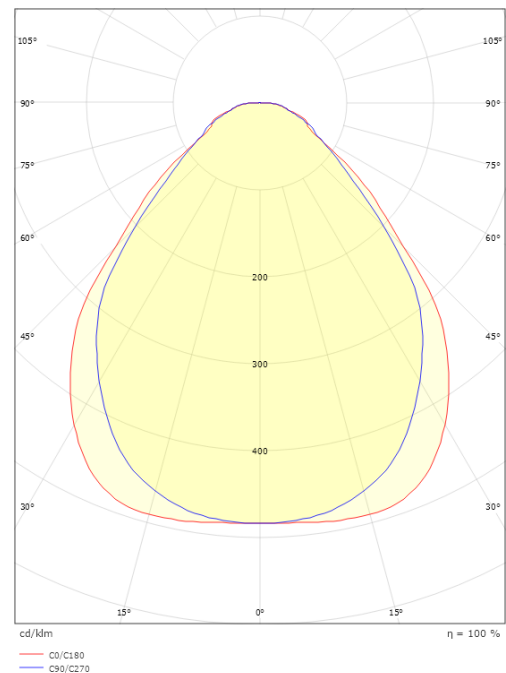

7 0 2 1 9 8 2 1 2 3 3 7 5