

Sense Surface



Sense Surface 300x1200 Black 3690lm 3000K Ra>80 Trailing edge

Article code: 212351
EAN: 7021982123511



Electrical

System wattage: 30W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 25, B16: 41, C10: 25, C16: 41

Light technic

Type of light source: LED
Luminous flux: 3690lm
Efficacy: 123 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<19
Visible flicker (PstLM): 0.08
Stroboscopic flicker (SVM): 0.08
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IK Class: IK10
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Module: 300x1200
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1202
Width (mm) W: 302
Height (mm) H: 45
Weight (kg) gross/net: 7.66 / 6.785

Packaging

Packing dimensions (mm): 1225 x 337 x 70

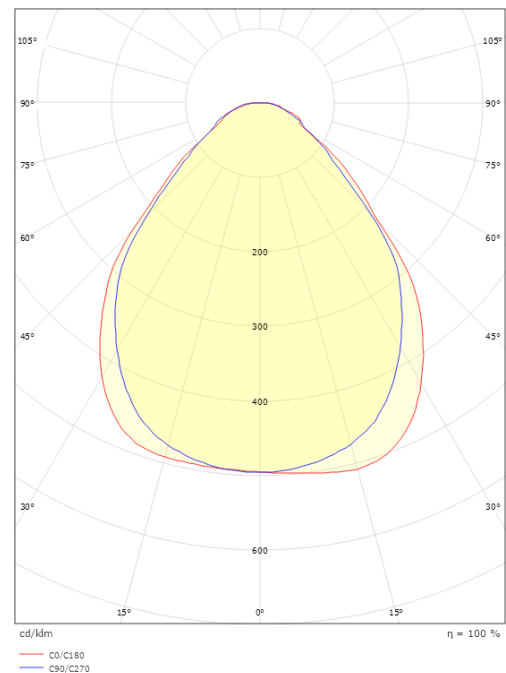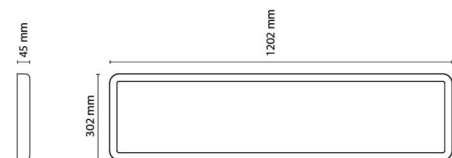

7 0 2 1 9 8 2 1 2 3 5 1 1