

Sense IP65 Eco



Sense IP65 Eco White 4060lm 3000K Ra>80 Trailing edge

Article code: 212390
EAN: 7021982123900



Electrical

System wattage: 34W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 4060lm
Efficacy: 119 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 89°
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge
Driver: 900mA

Protection

Luminaire class: Class II
IP Class: IP65

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting
Food Safety approved (IFS and HACCP): Yes

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: Exposed T-carrier 15/24mm

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 53
Weight (kg) gross/net: 4.1 / 3.85

Packaging

Packing dimensions (mm): 635 x 635 x 70

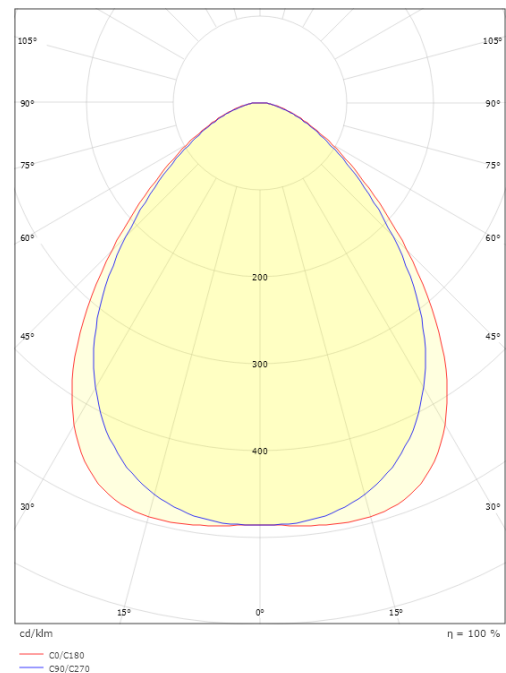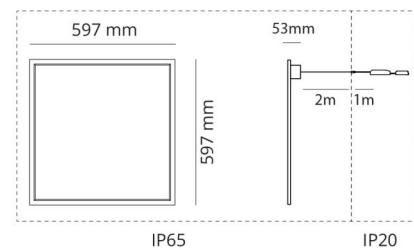

7 0 2 1 9 8 2 1 2 3 9 0 0