

Inspire 300 DALI



Inspire 300 3-Circuit Black 3500lm 4000K Ra>90 DALI-2

Article code: 212467
EAN: 7021982124679



Electrical

System wattage: 34W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 3500lm
Efficacy: 103 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Optic: Cubic Optic Black
UGR: UGR<22
Visible flicker (PstLM): 0,01
Stroboscopic flicker (SVM): 0,01
Photobiological safety: RG 1

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Surface, Indoor
Connection: ShopLine DALI track (adapter included)

Dimensions

Length (mm) L: 285
Width (mm) W: 82
Height (mm) H: 75
Weight (kg) gross/net: 0.83 / 0.7

Packaging

Packing dimensions (mm): 290 x 87 x 80

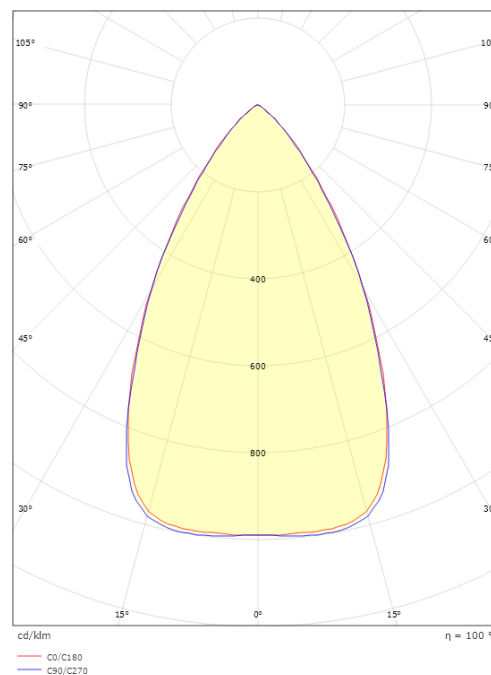

7 0 2 1 9 8 2 1 2 4 6 7 9