

Rax Soft 150 TW



Rax Soft 150 Satin 2700-6500K Ra>80 TW DALI Type 8

Article code: 212575
EAN: 7021982125751
Replaces: 212308



Electrical

System wattage: 28W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 22, B16: 36, C10: 37, C16: 61

Light technic

Type of light source: LED
Luminous flux: 2600lm (@6500K)
Emergency lumen: EM 280lm
Efficacy: 93 lm/W
Colour temperature: 2700-6500K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Satin Matt Reflector
Beam angle: 68°
Photobiological safety: RG 1

Control/Dimming

Type: TW DALI Type 8

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP54/IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Flame retardant polycarbonate
Colour: White/Satin mat
Optics: Polycarbonat (PC)

Mounting/Connection


Mounting: Recessed, Indoor
Connection: 5 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 83
Diameter (mm) D: 166
Cut-out (mm): 150
Ceiling void depth (mm): 80
Weight (kg) gross/net: 1.024 / 0.77

Packaging

Packing dimensions (mm): 190 x 190 x 95

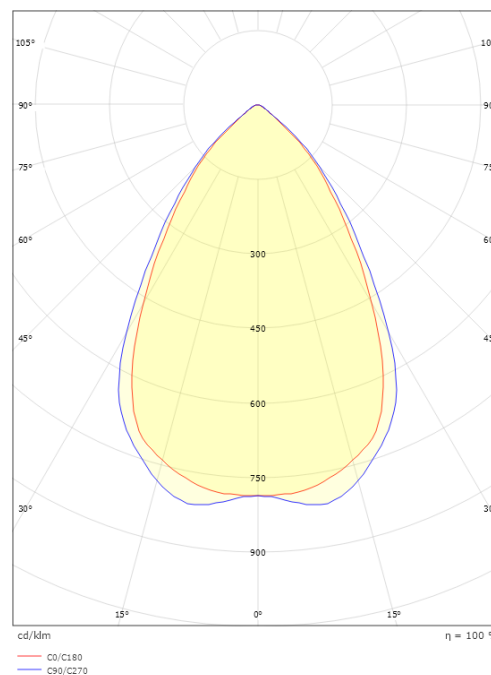

7 0 2 1 9 8 2 1 2 5 7 5 1