

Sense Pro X



Sense Pro X 600x600 White Incl driver 3980lm 3000K Ra>80 DALI-2

Article code: 212660
EAN: 7021982126604



Electrical

System wattage: 23W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
Luminous flux: 3980lm
Efficacy: 173 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Lifetime: L96>50,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<19
Visible flicker (PstLM): 0,02
Stroboscopic flicker (SVM): 0,01
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class II SELV
IP Class: IP20

Energy and approvals

Contains light source of energy class: B
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel, Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 600x600 Exposed T-carrier 15/24mm
Connection: Screwless terminal block

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 29
Weight (kg) gross/net: 3 / 2.5

Packaging

Packing dimensions (mm): 705 x 635 x 38

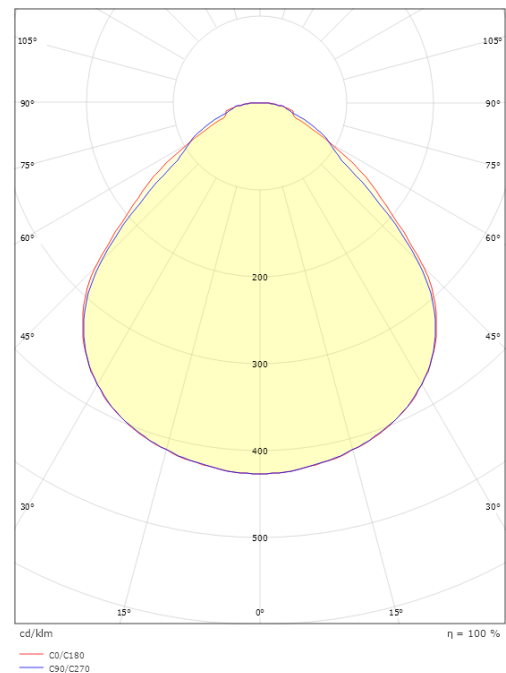

7 0 2 1 9 8 2 1 2 6 6 0 4