

Sense Pro X 600x1200



Sense Pro X 600x1200 White Incl driver 9140lm 3000K Ra>90 DALI-2

Article code: 212664
EAN: 7021982126642



Electrical

System wattage: 65W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 6, B16: 10, C10: 10, C16: 16

Light technic

Type of light source: LED
Luminous flux: 9140lm
Efficacy: 141 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Lifetime: L96>50,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<19
Visible flicker (PstLM): <1,0
Stroboscopic flicker (SVM): <0,4
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class II SELV
IP Class: IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel, Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 600x1200 Exposed T-carrier 15/24mm
Connection: Screwless terminal block

Dimensions

Length (mm) L: 1197
Width (mm) W: 597
Height (mm) H: 35
Weight (kg) gross/net: 6 / 5

Packaging

Packing dimensions (mm): 1410 x 635 x 38

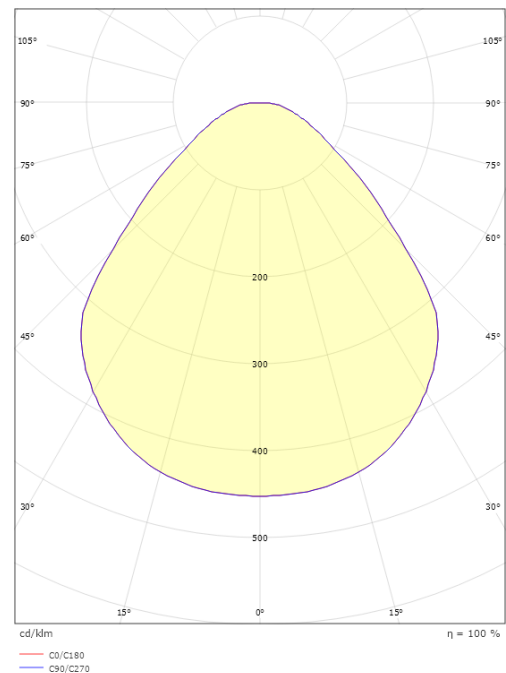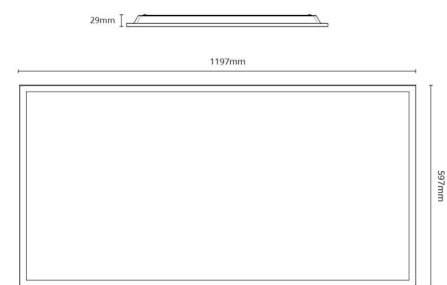

7 0 2 1 9 8 2 1 2 6 4 2