

Sense 600x600 Round



Sense Pro Round 600x600 White 2660lm 3000K Ra>80 Trailing edge

Article code: 212674+820490
EAN: 7021982126741+7021988204900



Electrical

System wattage: 25W
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 2660lm
Efficacy: 106 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°
UGR: UGR<18
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class III
IK Class: IK10
IP Class: IP40/IP20

Energy and approvals

Breem: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection




Module: Exposed T-carrier 15/24mm
Connection: Quick connector

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 11
Weight (kg) gross/net: 4.055 / 3.55

Packaging

Packing dimensions (mm): 645 x 640 x 43

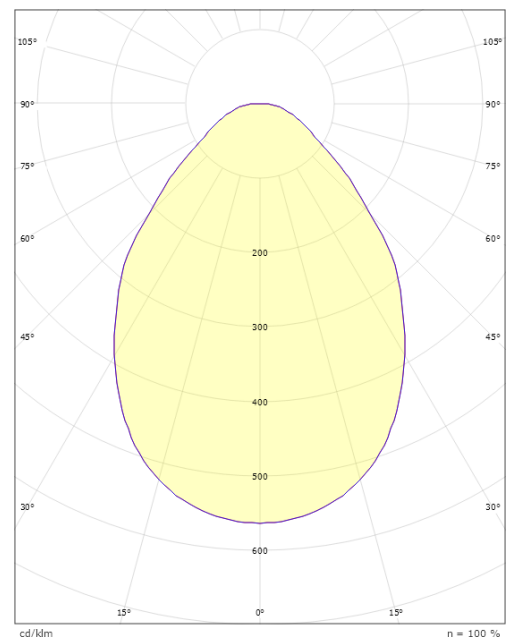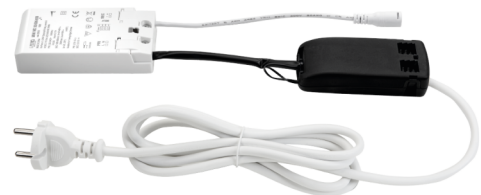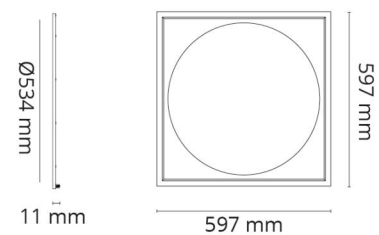

cd/km
— C0/C180
— C90/C270

η = 100 %



7021982126741+7021988204900