

Sense 600x600 Round



Sense Pro 600x600 White 3360lm 3000K Ra>80 Trailing edge / Linect

Article code: 212674+820493
EAN: 7021982126741+7021988204931



Electrical

System wattage: 32W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 3360lm
Efficacy: 105 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°
UGR: UGR<19

Control/Dimming

Type: Trailing edge / Linect
Driver: 900mA

Protection

Luminaire class: Class III
IK Class: IK10
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: Exposed T-carrier 15/24mm
Connection: 3 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 597
Width (mm) W: 597
Height (mm) H: 11
Weight (kg) gross/net: 4.055 / 3.55

Packaging

Packing dimensions (mm): 645 x 640 x 43

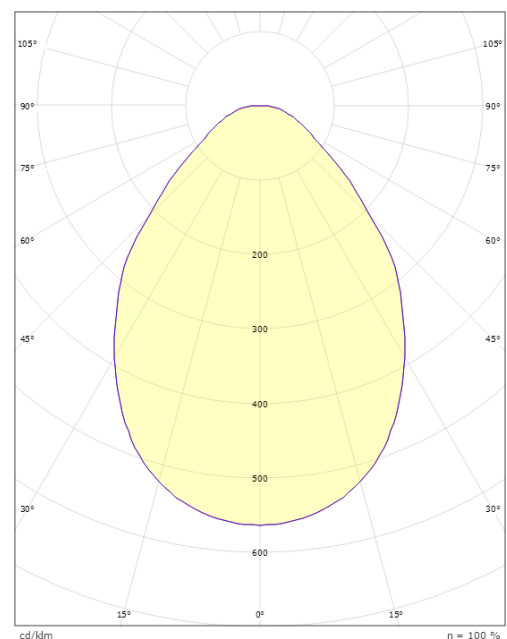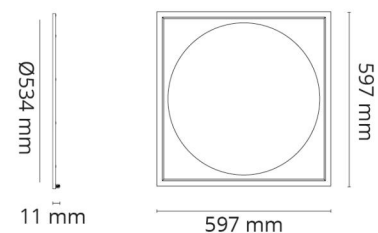

cd/ldm
— C0/C180
— C90/C270

$\eta = 100\%$



7021982126741+7021988204931