

Sense Pro Connect 300x1200



Sense Pro Connect 300x1200 White 3560lm 4000K Ra>80 Connect

Article code: 212687+820511
EAN: 7021982126871+7021988205112



Electrical

System wattage: 25W

Light technic

Type of light source: LED
Luminous flux: 3560lm
Efficacy: 142 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°
Photobiological safety: RG 0

Control/Dimming

Type: Connect

Protection

Luminaire class: Class III
IK Class: IK10
IP Class: IP40/IP20

Energy and approvals


Breem: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection

Module: 300x1200 Exposed T-carrier 15/24mm
Connection: Quick connector

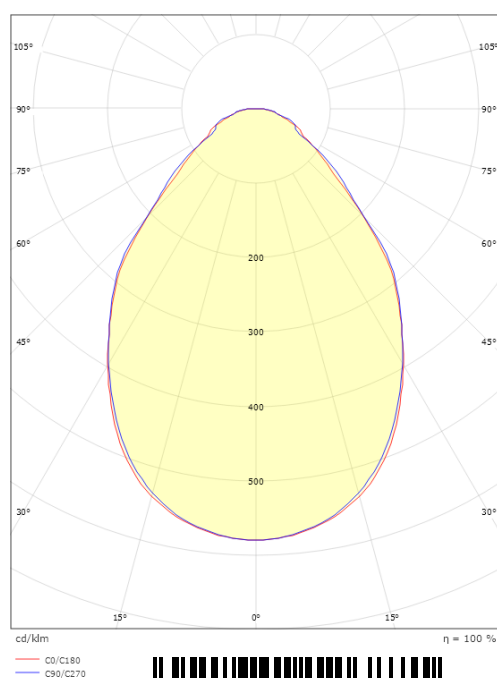

7021982126871+7021988205112