

Sense Pro Connect 300x1200



Sense Pro Connect 300x1200 White 4000K Ra>80 Connect

Article code: 212687
EAN: 7021982126871



Electrical

Voltage: 33V
Frequency (Hz): 50/60Hz

Light technic

Type of light source: LED
Light source included: Yes
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 110°
Photobiological safety: RG 0

Control/Dimming

Type: Connect

Protection

Luminaire class: Class III
IK Class: IK10
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: C

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 300x1200 Exposed T-carrier 15/24mm
Connection: Quick connector

Dimensions

Length (mm) L: 1197
Width (mm) W: 297
Height (mm) H: 11
Weight (kg) gross/net: 4.175 / 3.925

Packaging

Packing dimensions (mm): 1234 x 324 x 33

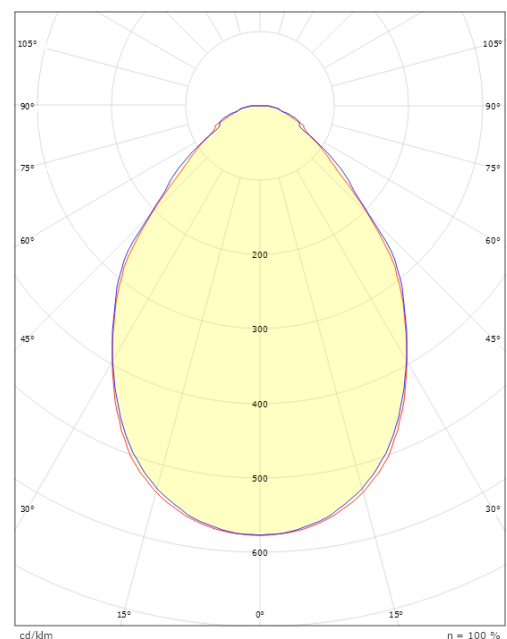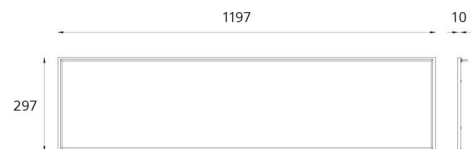

cd/ldm
C0/C180
C90/C270

$\eta = 100\%$



7 0 2 1 9 8 2 1 2 6 8 7 1