

Sense Basic Connect



Sense Basic 600x600 White Incl driver 4320lm 3000K Ra>80 Connect

Article code: 212706
EAN: 7021982127069



Electrical

System wattage: 33W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 20, B16: 32, C10: 33, C16: 54
Leakage current (mA): 0,5

Light technic

Type of light source: LED
Luminous flux: 4320lm
Efficacy: 131 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Light distribution: Direct
Optic: Opalprism
UGR: UGR<19
Visible flicker (PstLM): 0.09
Stroboscopic flicker (SVM): 0.04
Photobiological safety: RG 0

Control/Dimming

Type: Connect

Protection

Luminaire class: Class II SELV
IK Class: IK06
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 600x600
Connection: 3 pol Linect / screwless terminal block

Dimensions


Length (mm) L: 595
Width (mm) W: 595
Height (mm) H: 36
Depth (D): 29
Weight (kg) gross/net: 2.66 / 2.16

Packaging

Packing dimensions (mm): 710 x 635 x 50

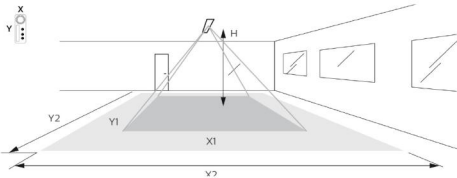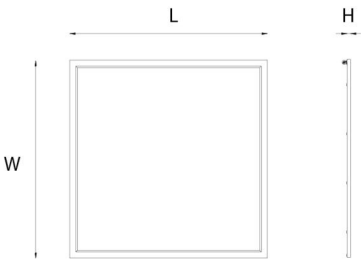

H (m)	Minor movements		Major movements	
	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2.4	1.9	2.9	2.9	4.3
3	2.4	3.6	3.6	5.4

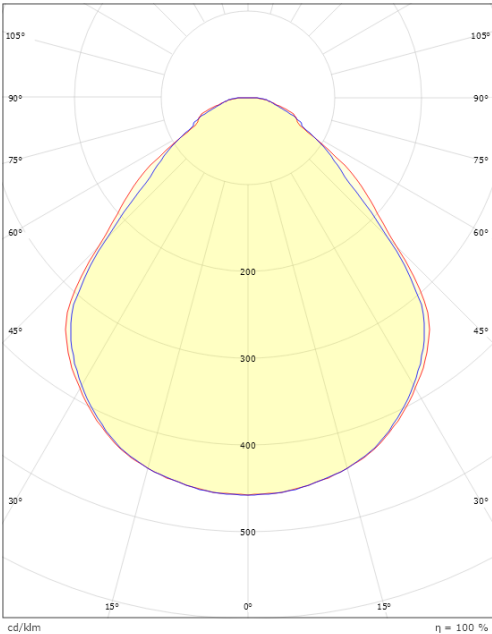

7 0 2 1 9 8 2 1 2 7 0 6 9