

Rax Soft 150 IP65



Rax Soft IP65 150 Black 4000 3680lm 4000K Ra>80 On/Off

Article code: 212753
EAN: 7021982127533



Electrical

System wattage: 34W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 17, B16: 27, C10: 28, C16: 45

Light technic

Type of light source: LED
Luminous flux: 3680lm
Efficacy: 108 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Satin Matt Reflector
Beam angle: 68°
UGR: UGR<25
Visible flicker (PstLM): 0.02
Stroboscopic flicker (SVM): 0.01
Photobiological safety: RG 1

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II SELV
IK Class: IK06
IP Class: IP65

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black/Satin mat
Optics: Glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Connection: 5 pol Screwless terminal block

Dimensions

Height (mm) H: 94
Diameter (mm) D: 175
Cut-out (mm): 150
Ceiling void depth (mm): 79
Weight (kg) gross/net: 2.2 / 1.8

Packaging

Packing dimensions (mm): 360 x 185 x 160

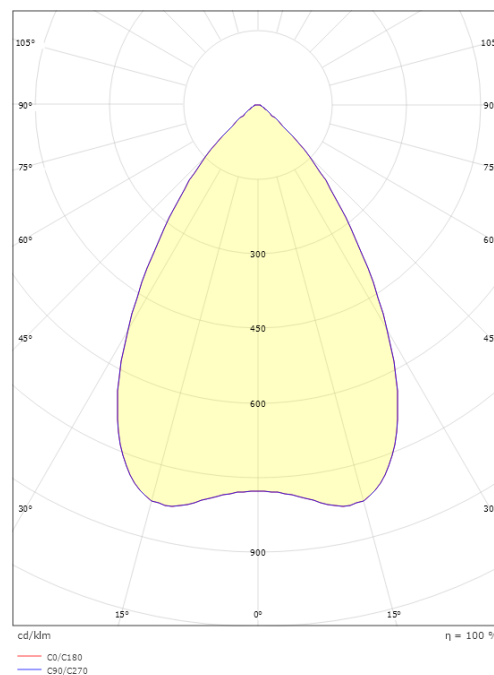

7 0 2 1 9 8 2 1 2 7 5 3 3