

Rax Soft Surface 150 IP65



Rax Soft Surface IP65 150 White 4000 3560lm 3000K Ra>80 On/Off

Article code: 212758
EAN: 7021982127588



Electrical

System wattage: 34W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 17, B16: 27, C10: 28, C16: 45

Light technic

Type of light source: LED
Luminous flux: 3560lm
Efficacy: 105 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Satin Matt Reflector
Beam angle: 68°
UGR: UGR<22
Visible flicker (PstLM): 0.02
Stroboscopic flicker (SVM): 0.01
Photobiological safety: RG 1

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK06
IP Class: IP65

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White/Satin mat
Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor / Outdoor
Connection: 5 pol Screwless terminal block

Dimensions

Height (mm) H: 196
Diameter (mm) D: 175
Weight (kg) gross/net: 3.03 / 2.78

Packaging

Packing dimensions (mm): 183 x 183 x 220

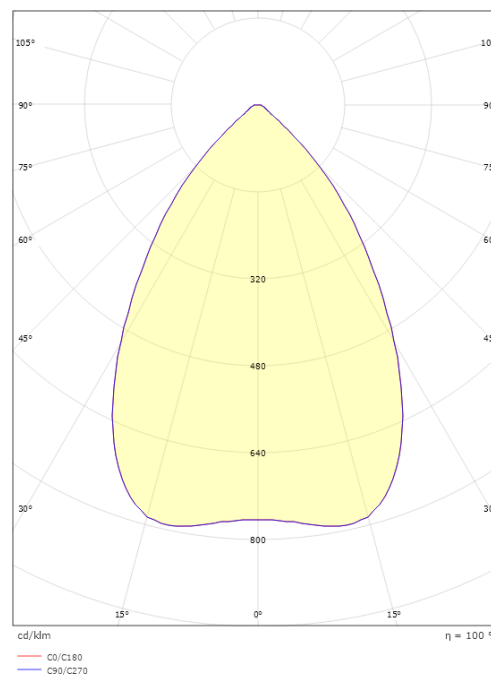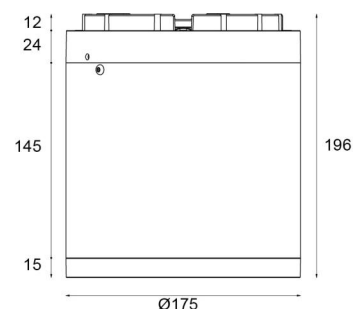

7 0 2 1 9 8 2 1 2 7 5 8 8