

Ecoline D/I



EcoLine 1200 White D/I 4650lm 3000K Ra>80 DALI-2

Article code: 212804
EAN: 7021982128042



Electrical

System wattage: 32W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 34
Leakage current (mA): 0,07

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 4650lm
Efficacy: 145 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Lifetime: L96>50,000
Light distribution: Direct/Indirect
Optic: Opalprism
UGR: UGR<16
Visible flicker (PstLM): 0,04
Stroboscopic flicker (SVM): 0

Control/Dimming

Type: DALI-2

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: B
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Optics: Acrylic (PMMA)

Mounting/Connection


Mounting: Suspended, Indoor
Module: 1200
Wire set: 2x2m wire kit
Cable: Cable 5x0,75mm² 2,5m
Connection: Cable 5x0,75mm² 2,5m white

Dimensions

Length (mm) L: 1235
Width (mm) W: 166
Height (mm) H: 58
Weight (kg) gross/net: 5.15 / 4.65

Packaging

Packing dimensions (mm): 1255 x 180 x 72

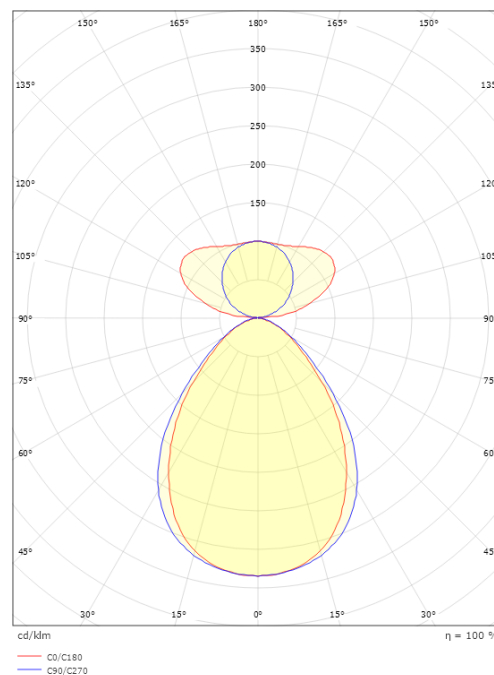

7 0 2 1 9 8 2 1 2 8 0 4 2