

# Inspire Prism



## Inspire 1500 White prism 4960lm 4000K Ra>80 DALI-2

Article code: 212865  
EAN: 7021982128653



### Electrical

System wattage: 35W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 12, B16: 20, C10: 21, C16: 29  
Leakage current (mA): 0.29

### Light technic

Type of light source: LED  
Luminous flux: 4960lm  
Efficacy: 142 lm/W  
Colour temperature: 4000K  
Colour rendering (Ra): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>100,000  
Lifetime: L96>50,000  
Light distribution: Direct/Indirect  
Optic: Prism Optic  
UGR: UGR<19  
Visible flicker (PstLM): <1  
Stroboscopic flicker (SVM): <0,4  
Photobiological safety: RG 0

### Control/Dimming

Type: DALI-2  
Driver: 950mA

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: B  
Breeam: Fulfil Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Optics: Polycarbonat (PC)

### Mounting/Connection


Mounting: Suspended, Indoor  
Module: 1500  
Wire set: 2x2m wire kit  
Cable: Cable 5x0,75mm<sup>2</sup> 2,5m

### Dimensions

Length (mm) L: 1465  
Width (mm) W: 38  
Height (mm) H: 67  
Weight (kg) gross/net: 4.3 / 3.9

### Packaging

Packing dimensions (mm): 1590 x 90 x 61

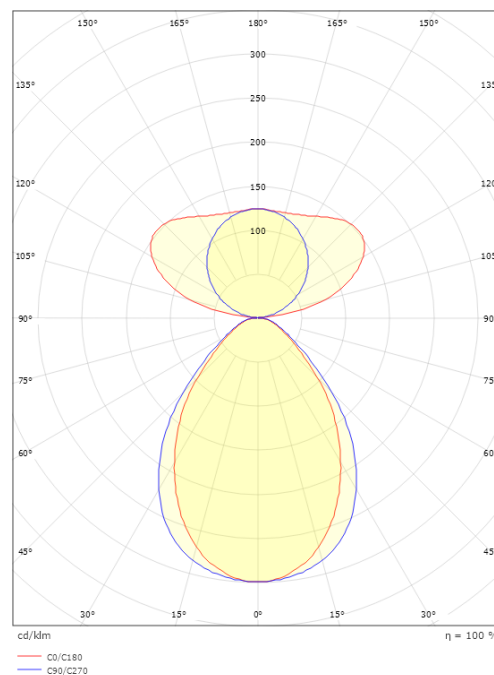

7 0 2 1 9 8 2 1 2 8 6 5 3