

Inspire Black 3470lm 2700K Ra>90 Trailing edge

Article code: 212876
EAN: 7021982128769



Electrical

System wattage: 32W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51
Leakage current (mA): 0.11

Light technic

Type of light source: LED
Luminous flux: 3470lm
Efficacy: 108 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct/Indirect 50/50%
Optic: Cubic Optic Black
UGR: UGR<16
Visible flicker (PstLM): 0,08
Stroboscopic flicker (SVM): 0,05
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Breem: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Polycarbonat (PC)

Mounting/Connection




Mounting: Suspended, Indoor
Wire set: 2x2m wire kit
Cable: Cable 3x0,75mm² 2,5m

Dimensions

Length (mm) L: 1241
Width (mm) W: 38
Height (mm) H: 67
Weight (kg) gross/net: 3.1 / 2.5

Packaging

Packing dimensions (mm): 1365 x 90 x 61

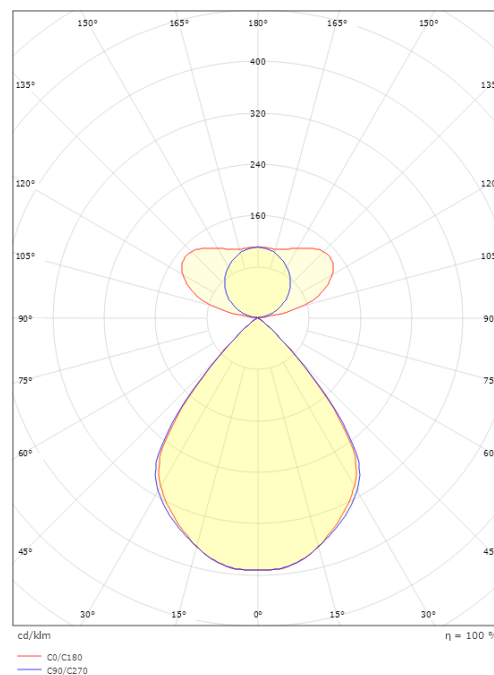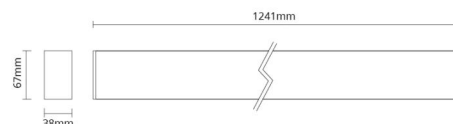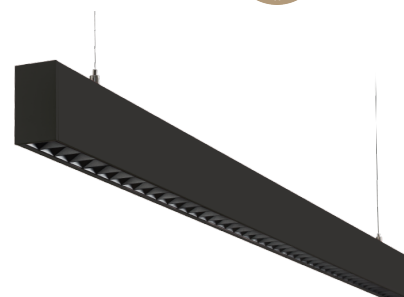

7 0 2 1 9 8 2 1 2 8 7 6 9