

Circulus Pendant



Circulus Pendant Black 1530lm 3000K Ra>80 Trailing edge

Article code: 214006
EAN: 7021982140068



Electrical

Wattage: 15W
System wattage: 15W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Luminous flux: 1530lm
Efficacy: 102 lm/W
Colour temperature: 3000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B10>50,000
Lifetime: L70/B50>100,000
Light distribution: Direct
Optic: Opal
Beam angle: 110°
UGR: UGR<25
Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class I
IP Class: IP20

Energy and approvals

Contains light source of energy class: B
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
Colour: Black (RAL 9004)
Optics: Acrylic (PMMA)

Mounting/Connection




Mounting: Suspended, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 280
Diameter (mm) D: 360
Weight (kg) gross/net: 3 / 2.3

Packaging

Packing dimensions (mm): 370 x 370 x 95

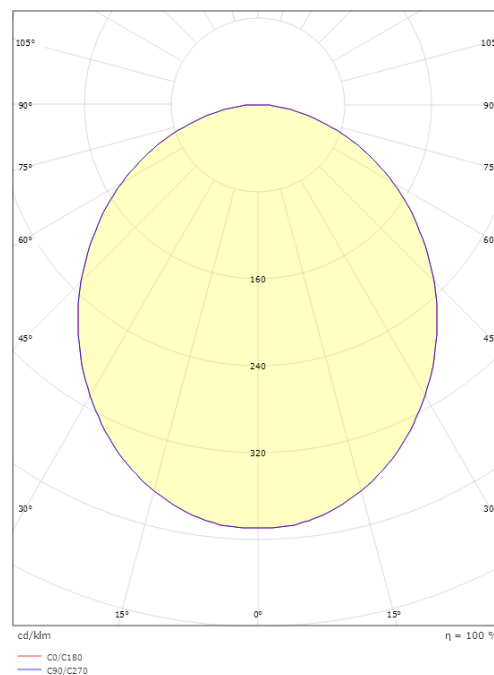

7 0 2 1 9 8 2 1 4 0 0 6 8