

Tube Micro R



Tube Micro R Black DimToWarm 590lm 2000-2800K Ra>95 Trailing edge

Article code: 320712
EAN: 7021983207128



Electrical

System wattage: 12W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 43, B16: 69, C10: 43, C16: 69

Light technic

Type of light source: LED
Luminous flux: 590lm
Efficacy: 49 lm/W
Colour temperature: 2000-2800K
Colour rendering (Ra): Ra>95
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Reflector
Beam angle: 36°
Visible flicker (PstLM): 0.06
Stroboscopic flicker (SVM): 0.05

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: UV-stabilized polycarbonate

Mounting/Connection



Mounting: Recessed, Indoor

Dimensions

Length (mm) L: 135
Width (mm) W: 39
Height (mm) H: 135
Cut-out (mm): 83
Distance to flammable materials: 10mm
Weight (kg) gross/net: 0.579 / 0.478

Packaging

Packing dimensions (mm): 215 x 100 x 105

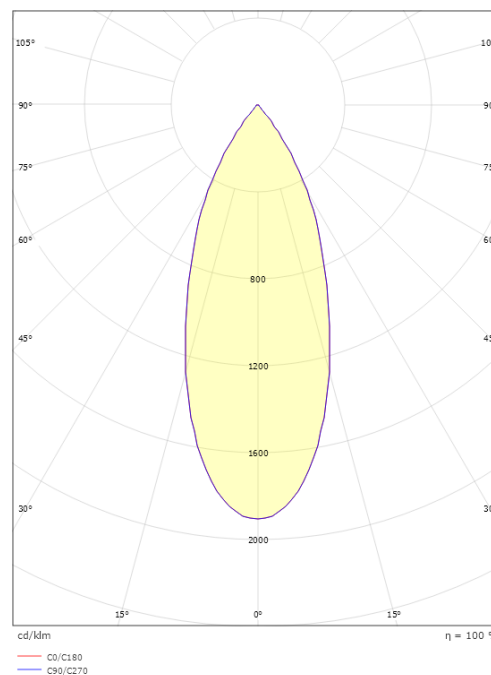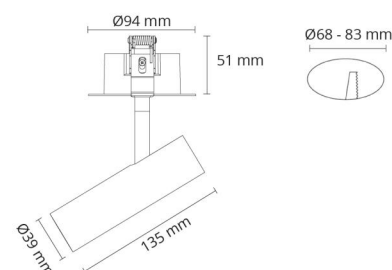

7 0 2 1 9 8 3 2 0 7 1 2 8