

Aneto 3-Circuit Black 2690lm 4000K Ra>90 On/Off

Article code: 320716
EAN: 7021983207166



Electrical

System wattage: 30W
Max. luminaires per circuit breaker: B10: 15, B16: 25, C10: 26, C16: 42

Light technic

Type of light source: LED
Luminous flux: 2690lm
Efficacy: 90 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>90
MacAdams factor: SDCM: 2
Lifetime: L90/B10>100,000
Maximum ambient temperature: 35°C
Light distribution: Direct
Optic: Reflector
Beam angle: 32°
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0.01

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor
Connection: ShopLine track (adapter included)

Dimensions

Height (mm) H: 120
Diameter (mm) D: 92
Weight (kg) gross/net: 1.16 / 0.96

Packaging

Packing dimensions (mm): 168 x 102 x 175

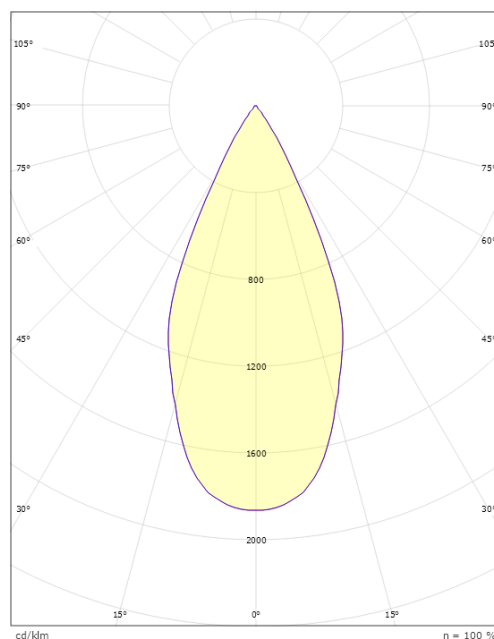

cd/klm
C0/C180
C90/C270

η = 100 %



7 0 2 1 9 8 3 2 0 7 1 6 6